# FCS-3403 GEMINI Fixed Dome IP Camera, 4-MP, H.265

## Product Images

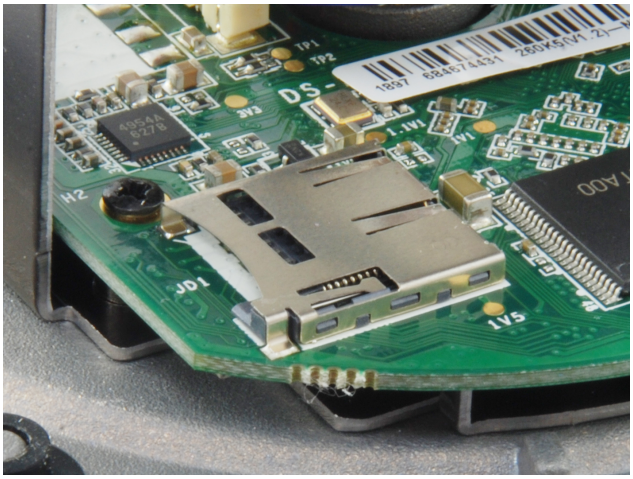

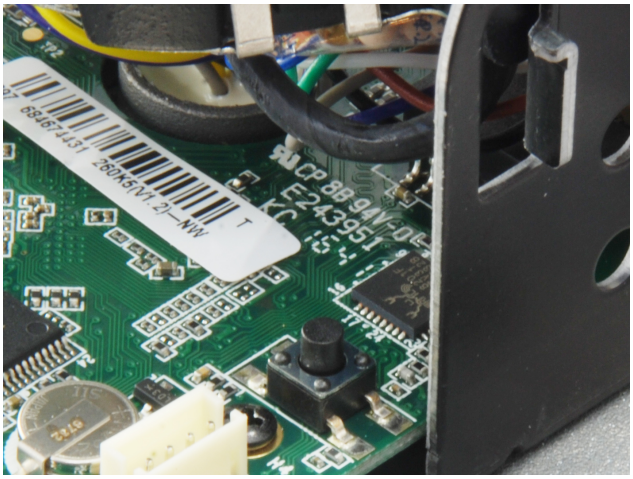

## Short Description

1. Features WDR (Wide Dynamic Range) to enhance visibility under extremely bright or dark environments
2. Free CMS (Central Management System) software with 64-channel license
3. Built-in Micro SD/SDHC/SDXC card slot for local storage
4. Built-in infrared LEDs for night viewing up to 30m
5. 4-Megapixel high-definition resolution
6. Video compression: H.264, H.265, MJPEG
7. Weatherproof IP66-rated housing

## Description

The LevelOne FCS-3403 is a fixed-position outdoor camera offering an ultra-reliable, cost-effective solution for outdoor IP surveillance networks, and is rated at IP67 to operate within rain, extreme heat, snow, dust and humid conditions. Offering clear, sharp imagery with 4-Megapixel resolution and the versatility of 802.3af standard PoE to transfer power and data via a single Cat.5 cable, the LevelOne FCS-3402 Should be an essential part of any security deployment that requires smart, reliable outdoor cameras.

## Additional Information

| | |
|---|---|
| Approval and compliance | CE,FCC,TVS 2000V Lightning Protection, Surge Protection and Voltage Transient Protection,IP67,IK10,RoHS |
| Max. operating temperature (°C) | 60 |
| Max. storage temperature (°C) | 95 |
| Min. operating temperature (°C) | -30 |
| Supported browsers | IE 9.0 or newer, Firefox with VLC, Chrome with VLC, Safari with QuickTime |
| Angle of view (°) | Horizontal field of view: 86 Vertical field of view: 46¬ Diagonal field of view: 102¬ |
| Audio format | G722.1/G711ulaw/G711alaw/G726/MP2L2/PCM |
| Image sensor | 1/2.7" Progressive Scan CMOS |
| Indicators | Power |
| IR cut filter | Yes |
| IR range | Up to 30 meter |
| Lens | Lens Mount:M12 4 mm @F2.0 |
| Resolution | Main Stream: 50Hz: 25fps (1920 * 1080, 1280 * 960, 1280 * 720) 60Hz: 30fps (1920 * 1080, 1280 * 960, 1280 * 720) Sub Stream: 50Hz: 25fps (640 * 480, 640 * 360, 320 * 240) 60Hz: 30fps (640 * 480, 640 * 360, 320 * 240) Third Stream: 50Hz: 25fps (1920 * 1080, 1280 * 720, 640 * 360, 352 * 288) 60Hz: 30fps (1920 * 1080, 1280 * 720, 640 * 360, 352 * 240) |
| Shutter time | 1/3 s to 1/100,000 s |
| Storage capacity | Built-in MicroSD/SDHC/SDXC slot, up to 128G |
| Standards | IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP,SNMP, QoS |
| Video format | Main stream: H.265/H.264 Sub stream: H.265/H.264 /MJPEG Third stream: H.265/H.264 |
| Features | One-key reset, anti-flicker, three streams, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter |
| Product weight (kg) | 0,5 |

| | |
|---|---|
| Product breadth (mm) | 111 |
| Product depth (mm) | 111 |
| Product height (mm) | 82 |
| Color | White |
| EAN | 4015867207703 |
| Model number | FCS-3403 |
| Package contents | FCS-3403 Screw Kit Quick Installation Guide Resource CD (User Manual, Utility, QIG) |
| Camera Type | Dome |
| Resistance | Weatherproof |
| Zoom Type | Fixed |
| 2-way Audio | Yes |
| IR Leds for night vision | Yes |
| PoE Supported | Yes |
| Max. Resolution | 4 Megapixels |
| IP Camera series | GEMINI |
| Power Consumption | 12 VDC, 0.7 A, max. 8.5W, ? 5.5mm coaxial plug power PoE (802.3af, 36V to 57V), 0.3 A to 0.1 A, max. 10W |